




Corrugated Pipe

pipexpert


COMPATIBILITY WITH ALL OUR PIPES

Physical Properties

Material	High density polyethylene
Compressive stress	≥ 450 N
Impact resistance	15 J
Working temperature range	-10 °C to 100 °C
Chemical resistance	Resistant to organic acids and solvents
Mechanical properties	Elasticity, flexibility and abrasion resistance

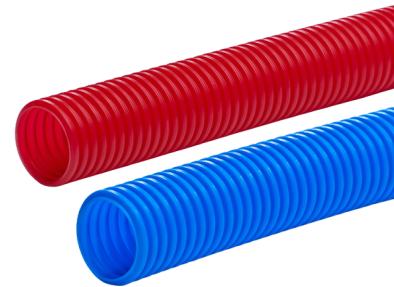

Diameter Pipe (mm) Internal A	Outer B	Inner C	Tolerance
12	22	16	± 0.5
16	26	20	± 0.5
18	32	24	± 0.5
20	32	24	± 0.5
25	40	30	± 0.5
26	40	30	± 0.5
32	50	40	± 0.5
DUO			
12	22	16	± 0.5
16	26	20	± 0.5

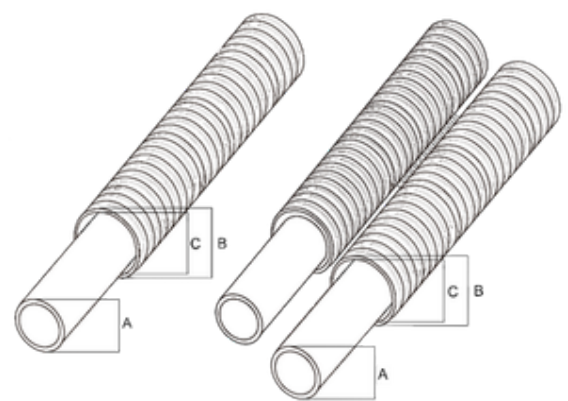

Standards

- EN 50086
- EN 60423
- EN 61386

DUO

Pipe Diameter (mm)	(*) Colours	m/roll	Inner Diameter (mm)	Width (mm)	Outer Diameter (mm)	Coils/Pallet	Pallet / Truck
12	Blue / Red	50	280	210	550	18	66
12	Blue / Red	100	280	220	700	7	66
16	Blue / Red	50	280	210	550	18	66
16	Blue / Red	100	280	220	700	7	66
18	Blue / Red	50	300	130	750	16	48
20	Blue / Red	50	300	130	740	8	66
25	Blue / Red	50	280	200	750	6	66
26	Blue / Red	50	270	180	800	13	48
32	Blue / Red	50	340	380	750	6	66

DUO

12	Blue / Red	50	250	310	600	8	66
12	Blue / Red	100	250	300	700	5	66
16	Blue / Red	50	280	220	780	7	66
16	Blue / Red	100	280	220	780	7	66

Other colours under request

Corrugated ENGL 062026

pipexpert GmbH

Amonshöhe 21 · 97437 Haßfurt, Germany · Tel. +49 (0) 172 829 18 84 · info@pipexpert.de · www.pipexpert.de
Geschäftsführer: Michael Pfister, Michael Walter · Amtsgericht Bamberg · HRB 12493 · USt-IdNr. DE461696082